


RKB 600X350 D1



RKB

- Duct fan with rectangular connections.
- Proven performance and reliability.
- High capacity and very good efficiency.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- For speed control a transformer or electric speed controller can be connected.
- Fan housing is manufactured from galvanized sheet steel.
- Swing-out design to simplify maintenance and cleaning of the impeller.
- The fan is intended to be installed in a duct system.
- A duct connected fan can be installed outside or in damp environments.
- Easy installation in any position.


DIAGRAMS

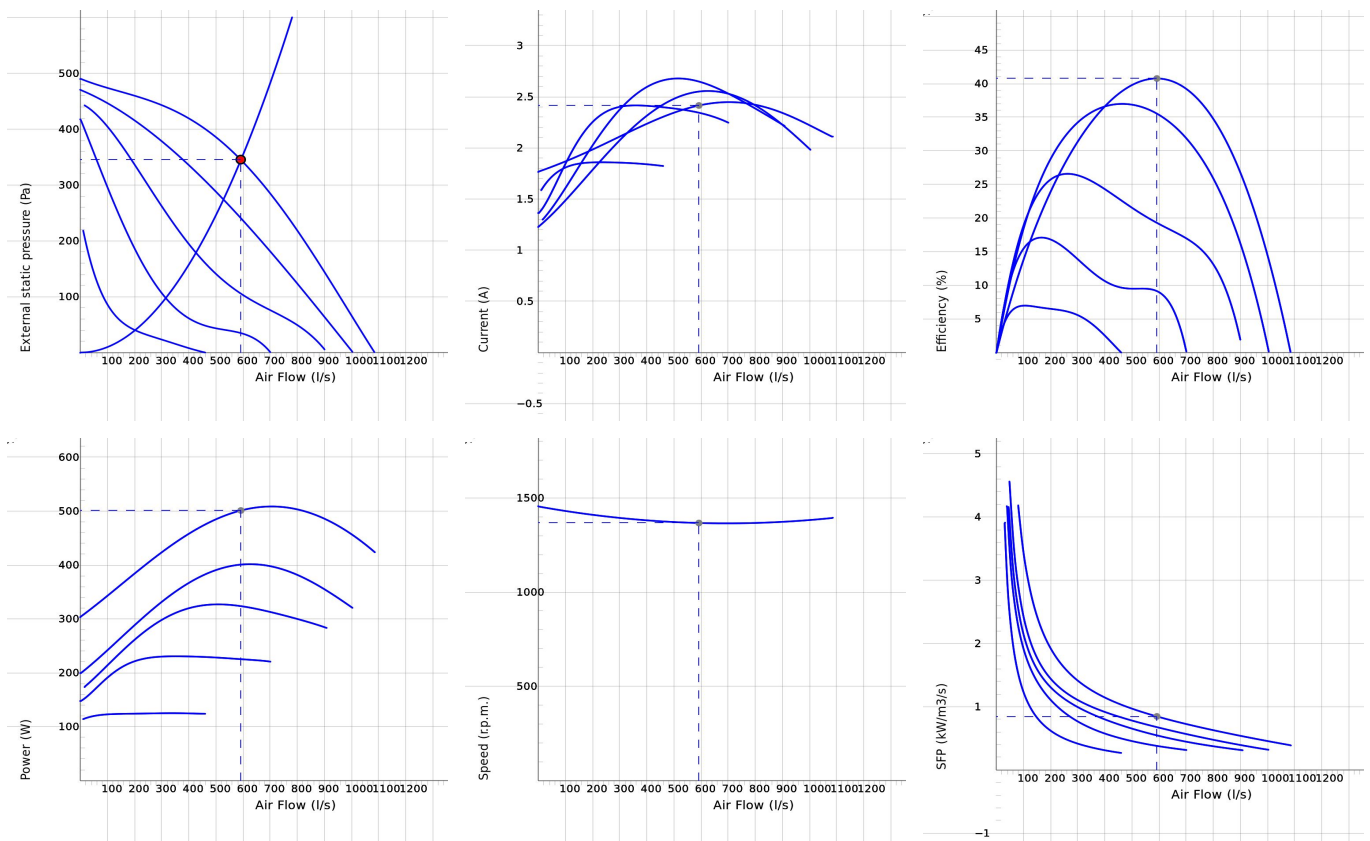

Work Point

Air Flow (l/s)	External static pressure (Pa)	Power (W)	Speed (r.p.m.)	Current (A)	Efficiency (%)	SFP (kW/m³/s)	Voltage (V)
592	345	501	1367	2.42	40.8	0.847	230

SOUND DATA

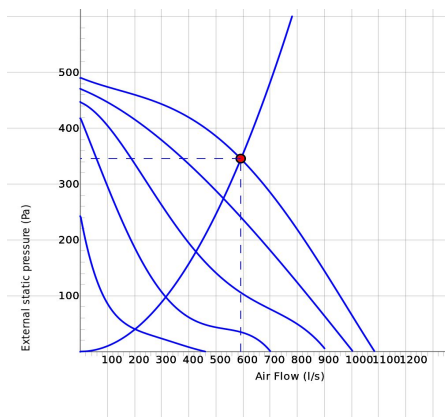

	Tot	63	125	250	500	1k	2k	4k	8k
Inlet Lw dB(A)	77	61	68	75	63	64	65	60	53
Outlet Lw dB(A)	81	61	70	79	70	73	70	65	58
Surrounding Lw dB(A)	63	41	53	58	55	56	53	50	42
Surrounding Lp dB (A) 3m	56								

Work Point


Air Flow (l/s) 592	External static pressure (Pa) 345	Power (W) 501	Speed (r.p.m.) 1367	Current (A) 2.42	Efficiency (%) 40.8	SFP (kW/m3/s) 0.847	Voltage (V) 230
-----------------------	---	------------------	------------------------	---------------------	------------------------	------------------------	--------------------

TECHNICAL DATA

Parameter	RKB 600x350 D1 man tp 7480025		RKB 600x350 D1 aut tp 7480006	
	Value	Unit	Value	Unit
Voltage	230	V	230	V
Phase	1	~	1	~
Frequency	50	Hz	50	Hz
Power	515	W	515	W
Current	2.46	A	2.46	A
Speed	1370	r.p.m.	1370	r.p.m.
Max. temperature of transported air	45	°C	45	°C
Max. temperature of transported air when speed controlled	45	°C	45	°C
Sound pressure level at 3 m	55	dB(A)	55	dB(A)
Weight	33	kg	33	kg
Enclosure class	54	IP	54	IP
Insulation class, motor	F		F	
Capacitor	12	µF	12	µF
Duct connection	600x350 mm	mm	600x350 mm	mm
Max. flow	1085	l/s	1085	l/s
Max. pressure	491	Pa	491	Pa
Voltage range	220-240	V	220-240	V

WIRING DIAGRAM

4040005

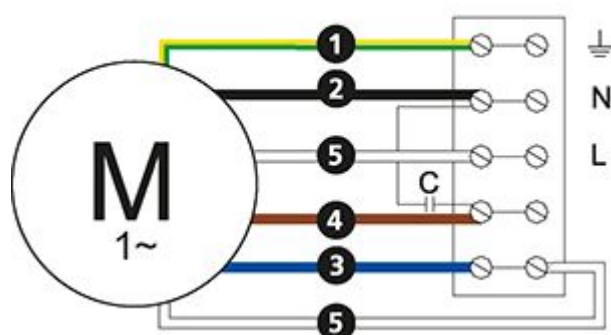

(M) = Fan Motor

(M1) = Fan Motor

(M2) = Fan Motor

(M3) = Rotor Motor

1 = Yellow/Green

2 = Black

3 = Blue

4 = Brown

5 = White

6 = Orange

7 = Grey

8 = Red


9 = Green

10 = Violet

11 = Quick switch

12 = Yellow

DIMENSIONS

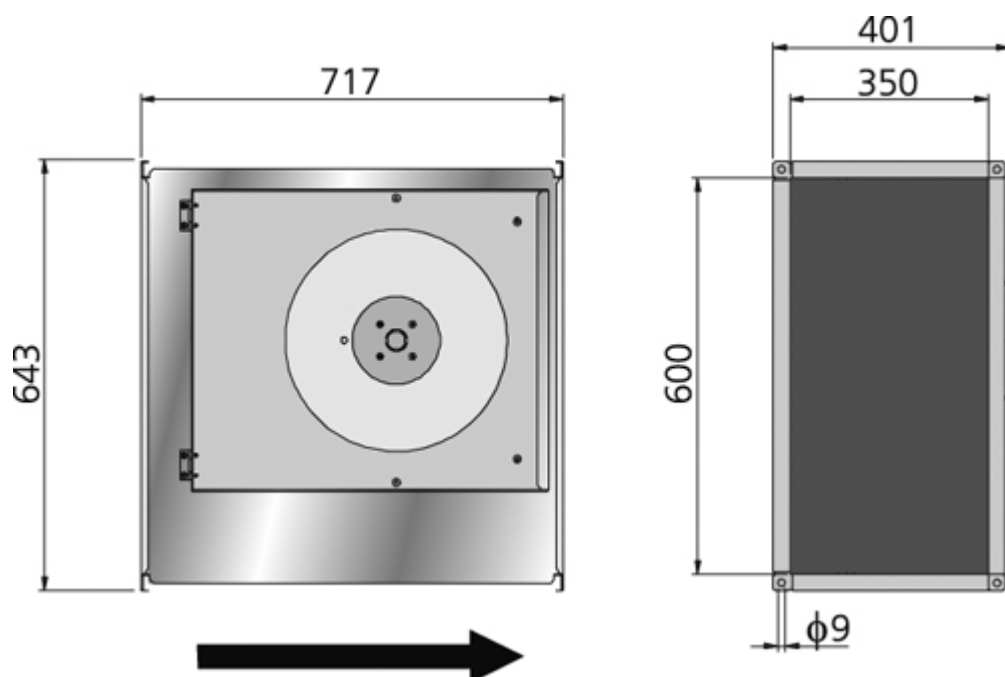

ACCESSORIES

Mechanical accessories



Mounting bracket Kit Flexible connection
Universal



Flexible connection
600x350



Silencer LDR 600x350

Electrical accessories



Transformer
controller VRTE 3



Transformer
controller VRDE 3